

# nifty

# 210

## TRAILER MOUNTED ACCESS PLATFORM



**21.00m (69ft)**  
Working height

**12.15m (39ft 10in)**  
Working outreach

**Platform Rotation**  
Better platform positioning

**Unrestricted Outreach**  
225kg capacity at max outreach

**Fully Proportional  
Hydraulic Controls**  
Simple, reliable & easy to maintain

**Hydraulic Outriggers**  
For quick and easy setup

**Bi-Energy Available**  
Optimising utilisation

**Traction Drive Option**  
Driven from the platform for easy  
manoeuvrability on site



[niftylift.com](http://niftylift.com)




# nifty 210

The **Nifty 210** has one of the largest unrestricted working envelopes in its class. Hydraulic outriggers make it quick and easy to set up and an optional traction drive system, operated from the platform, allows the **210** to be positioned on site with minimal effort. Platform rotation provides greater manoeuvrability in the air and its fully proportional controls give the operator precise control when positioning the platform, even on hard to reach jobs.

## SAFETY FEATURES

- Outriggers with Audible and Visible Alarms
- Double Acting Cylinders
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked

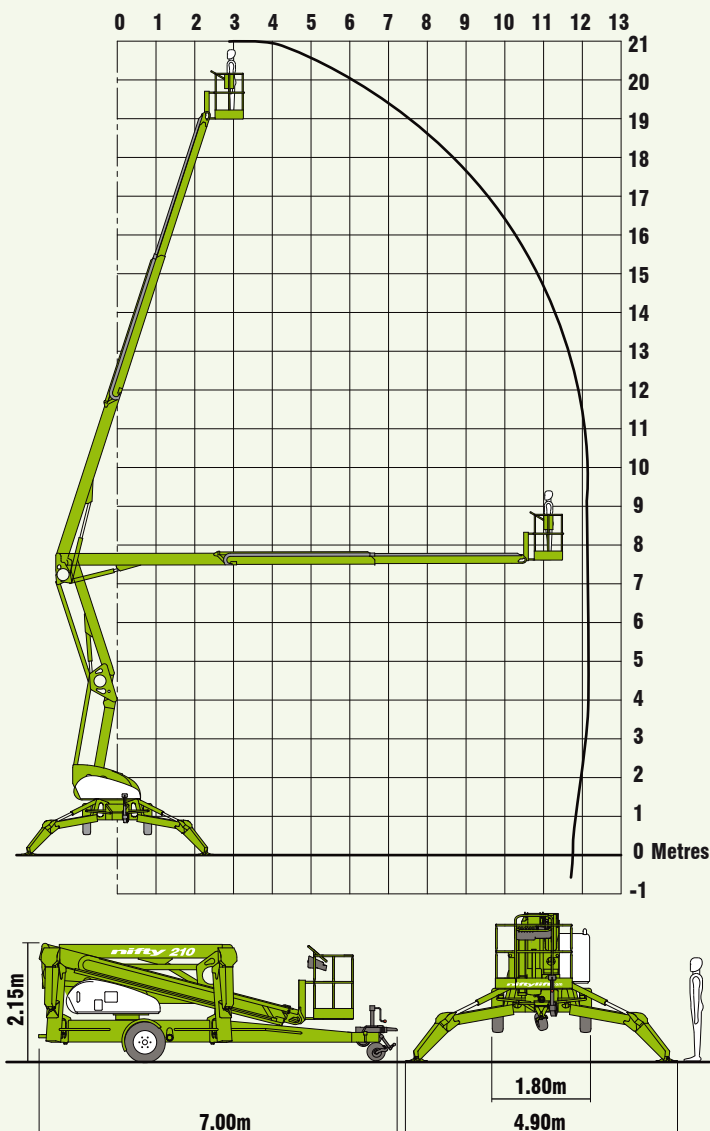

The **210's** special boom design makes it ideal for working near walls or buildings. A single control allows its platform to move vertically while remaining parallel to the job, saving time and improving efficiency.

## SPECIFICATIONS

<b>Working Height</b>	21.00m	69ft
<b>Platform Height</b>	19.00m	62ft 5in
<b>Working Outreach</b>	12.15m	39ft 10in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.80m	5ft 10in
<b>- Working</b>	4.90m	16ft 1in
<b>Height</b>	2.12m	6ft 11in
<b>Length</b>	7.00m	22ft 10in
<b>Weight</b>	3,300kg*	7,300lbs*
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	225kg	500lbs
<b>Platform Size</b>	1.40m x 0.70m	4ft 7in x 2ft 4in
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only	
	Diesel Only	
	Bi-Energy (Engine & Mains)	
<b>Drive Option</b>	Traction Drive	

\* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

**Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.**

**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

[www.niftylift.com](http://www.niftylift.com)

e-mail: [info@niftylift.com](mailto:info@niftylift.com)

Tel.: +44 (0) 1908 223456

Fax.: +44 (0) 1908 312733

